


Plug-in sockets and accessories

GUC11S-V0 ③


For RUC faston 4,8x0,5, RUC-M

Screw terminals
 Cross section of the cables: max. 1 x 4 mm²
 / 2 x 2,5 mm² (1 x 12 / 2 x 14 AWG),
 min. 1 x 0,25 mm² (1 x 23 AWG)
 Max. tightening moment
 for the terminal: 0,7 Nm


35 mm rail mount
 acc. to EN 60715
 81,5 x 35,5 x 26,5 mm
 Three poles
 16 A, 250 V AC



Connection diagram



Dimensions

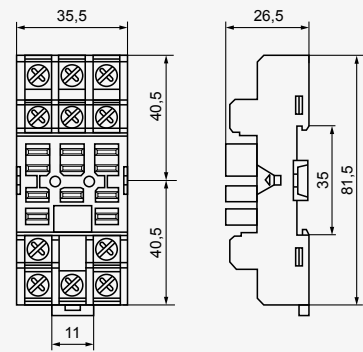


Accessories

MBA


PI6W-1P

For RM699BV, RSR30 ④


Screw terminals
 Max. tightening moment
 for the terminal: 0,3 Nm
 35 mm rail mount
 acc. to EN 60715
 98,5 x 6,2 x 85,5 mm
 One pole
 6 A, 250 V AC



Connection diagram

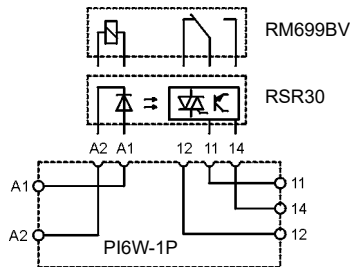

Dimensions

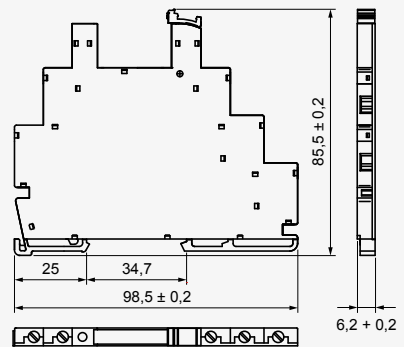

Accessories

ZG20

PI6W-1246

③ For RUC faston 4,8 x 0,5 and RUC-M, with GUC11S-V0 socket, max. switching voltages and coil voltages of relays are limited to 250 V AC / DC.

④ Solid state relays type **RSR30** - see www.repol.com.pl

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.